

# Vertical Fold Flat Mask 222 - FFP2 - VALVED

HANDY SIZED & EASILY POCKETED HYGIENIC FOLD FLAT DISPOSABLE MASK

TECHNICAL  
SPECIFICATION

RESPIRATORY PROTECTION

## INSTRUCTIONS FOR USE


Mask must be fitted in accordance with the instructions supplied  
Care must be taken to ensure that the correct mask type is selected for the work to be carried out  
If in doubt as to the type of mask required seek professional guidance

## PERFORMANCE

Offers an assigned protection factor (APF) of 10 x Workplace Exposure Limit (WEL) for fine non-toxic dusts, fibres, fumes and mists

## DIMENSIONS OF OUTER PACKAGING

Quantity: 100 (10 inner packs of 10 masks)  
Weight: 3.1kg (Approx)

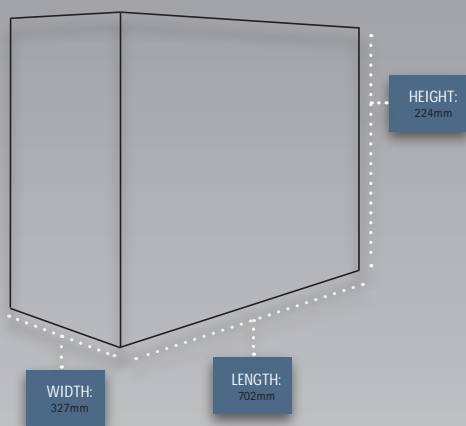


## DIMENSIONS OF MASK

Depth: 110mm  
Width: 108mm  
Height: 140mm  
Weight: 14g (Approx)

## CLEANING & MAINTENANCE

Not Applicable - Disposable Product  
Store the masks out of sunlight away from chemicals in a dry atmosphere

MAN MADE FIBRES:  
The mask has an ergonomic 3D design to fit most face shapes

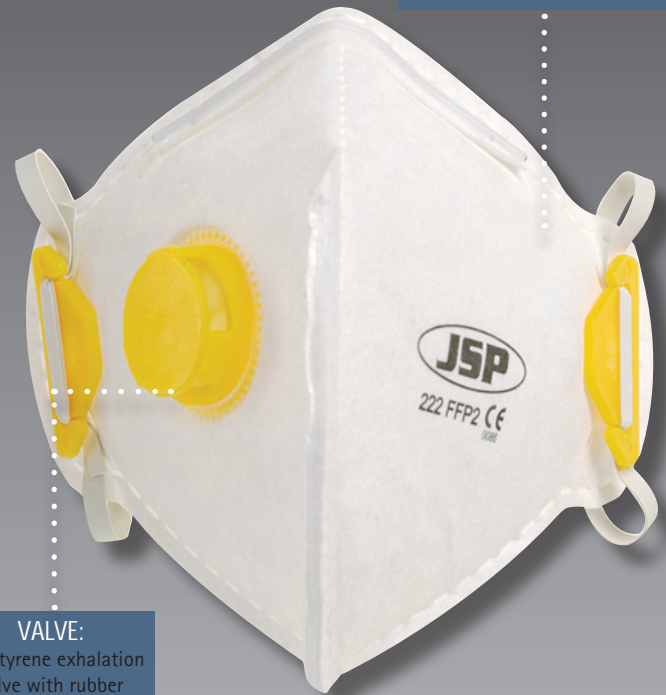

VALVE:  
Polystyrene exhalation valve with rubber diaphragm

## LIMITATIONS OF USE

Protection will only be offered if the mask is fitted correctly  
The mask, when in contact with the skin may cause allergic reactions to susceptible individuals  
Do not use where exposure to chemical gases may be experienced  
Use in well ventilated areas only, which are not deficient in oxygen and do not contain explosive atmospheres  
Ensure good seal around the face is created before entering the hazard area  
The working life of the mask is nominally one day (this is based on an working day shift of 8 hours), however it may be affected by many factors, including work rate, airflow and concentration of any contaminant in the atmosphere. The mask should be changed immediately if,  
a.) Breathing difficulties due to clogging are experienced,  
b.) Breakthrough of a contaminant is detected by smell, taste or any other means, or  
c.) The mask becomes damaged

## CONFORMITY & MARKINGS

Meets the FFP2 requirements of EN149  
EC Certificate Number 560229, issued by BSi Product Certification  
EN149:2001 + A1:2009