

TYPHOON™

335 - FFP3 - VALVED

HORIZONTAL FOLD FLAT MASK OFFERING EXTREMELY LOW BREATHING RESISTANCE, CO₂ BUILD UP, HEAT BUILD UP & MOISTURE BUILD UP

TECHNICAL
SPECIFICATION

RESPIRATORY PROTECTION

INSTRUCTIONS FOR USE

Mask must be fitted in accordance with the instructions supplied

Care must be taken to ensure that the correct mask type is selected for the work to be carried out

If in doubt as to the type of mask required seek professional guidance

PERFORMANCE

Offers an assigned protection factor (APF) of 20 x Workplace Exposure Limit (WEL) for fine non-toxic dusts, fibres, fumes and mists

360° Comfort Foam: A foam area around the inside of the mask provides a perfect fit and maximum resistance as well as preventing misting

Welded Nose Piece: The welded nose piece prevents any irritation, misshaping and a tighter fit

Latex Free Adjustable Strap: The adjustable strap means it can be fitted comfortably to all head sizes and shapes

Unique Valve: The silicone valve is unaffected by any moisture, and therefore can be used with the same performance under very low temperatures




MAN MADE FIBRES:

Horizontal fold flat shape for better fitting and clearer vision as well as convenience and ease of use



VALVE:

Polystyrene exhalation valve with rubber diaphragm



CLEANING & MAINTENANCE

Not Applicable - Disposable Product

Store the masks out of sunlight away from chemicals in a dry atmosphere

CONFORMITY & MARKINGS

Meets the FFP3 NR D requirements of EN149

EC Certificate Number 560229, issued by BSi Product Certification

EN149:2001+A1:2009



TYPHOON™

335 - FFP3 - VALVED

HORIZONTAL FOLD FLAT MASK OFFERING EXTREMELY LOW BREATHING RESISTANCE, CO₂ BUILD UP, HEAT BUILD UP & MOISTURE BUILD UP


TECHNICAL
SPECIFICATION

RESPIRATORY PROTECTION

DIMENSIONS OF OUTER PACKAGING

Quantity: 100 (10 inner packs of 10 masks)

Weight: 3.5kg (Approx.)

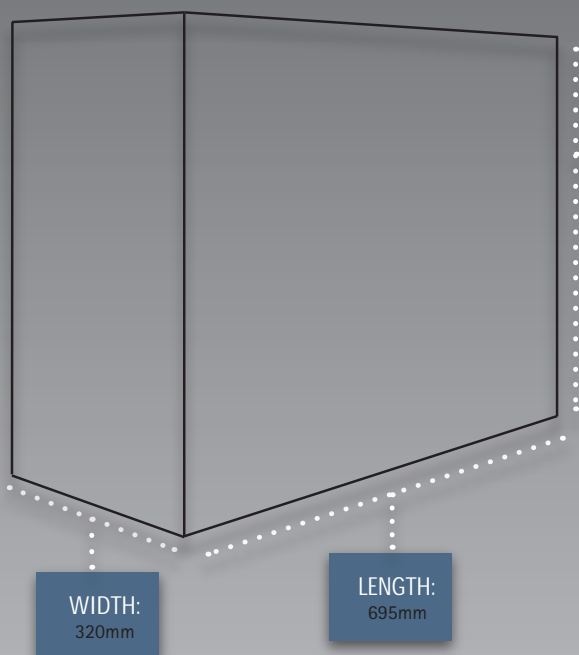

HEIGHT:
240mm

WIDTH:
320mm

LENGTH:
695mm

TYPHOON™ APPLICATION GUIDE

FILTRATION EFFICIENCY	99%
BRICK DUST	YES
FERROUS METAL FUME	YES
MDF HAND TOOLS	YES
CONCRETE	YES
PLASTER	YES
ROCKWOOL	YES
SANDSTONE	YES
WOOD HARD	YES

LIMITATIONS OF USE

Protection will only be offered if the mask is fitted correctly

The mask, when in contact with the skin may cause allergic reactions to susceptible individuals

If this occurs leave the hazard area, remove mask and seek medical advice

The use by date is printed on the outer packaging

Do not use where exposure to chemical gases may be experienced

Use in well ventilated areas only, which are not deficient in oxygen and do not contain explosive atmospheres

Ensure good seal around the face is created before entering the hazard area

The working life of the mask is nominally one day (this is based on an working day shift of 8 hours), however it may be affected by many factors, including work rate, airflow and concentration of any contaminant in the atmosphere. The mask should be changed immediately if,

- Breathing difficulties due to clogging are experienced,
- Breakthrough of a contaminant is detected by smell, taste or any other means, or
- The mask becomes damaged

This mask is not designed to be worn by people with facial hair

DIMENSIONS OF MASK

Length: 84mm

Width: 175mm

Height: 110mm

Weight: 21g (Approx.)

