

EVO[®] GOGGLE INDIRECT VENTED - CLEAR LENS

PRODUCT CODE: AGM020-623-000 - ALSO KNOWN AS: G241

SLEEK, MODERN DESIGN, ENGINEERED TO OFFER OUTSTANDING PERFORMANCE, COMFORT AND LOOKS. OFFERING DUST, LIQUID SPLASH, MOLTEN METAL, EXTREME TEMPERATURE AND 99.9% UV PROTECTION

**TECHNICAL
SPECIFICATION**

EYE & FACE PROTECTION

INSTRUCTIONS FOR USE

In use ensure that the safety goggles fit comfortably and securely on the head

Ensure that the safety goggles are in place, before entering the hazard area



EVO[®] GOGGLE ATTRIBUTES

Lightweight

Anti-Mist

Molten Metal protection

Indirect Vented

Contour Design

Polycarbonate Lens

High Level of Protection

Extremely Comfortable

Fully compatible with the JSP EVO[®] Range of industrial safety helmets

MistResist⁺

EVO[®] GOGGLE FEATURES & PERFORMANCE

Lens and body offer protection against medium energy high-speed particles at 120 m/s (270mph) and protection against high-speed particles at extremes of temperature

The optical qualities of the lens comply with the requirements of optical class 1 (highest)

Offers dust, liquid splash, molten metal and extreme temperature protection

Also offers 99.9% protection against UV radiation

EVA foam on the goggle housing provides a comfortable fitting to a wide range of facial profiles

Can be used with an RX insert for attaching prescription eyewear

Low profile design means the EVO-Goggle™ can be worn with an industrial safety helmet or bumpcap

Wide 30mm elastic headband for improved comfort and a secure fit

MISTRESIST⁺™ LENS COATING

A permanent coating that has passed EN166 testing for N (Anti-Mist) and provides excellent performance by surpassing EN166 Anti-Mist requirements by 3 times over



CLEANING & MAINTENANCE

The goggles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

Store in packaging provided, out of direct sunlight, away from chemicals and not exposed to extremes of temperature

CONFORMITY

Conforms to EN 166 1.B.T.3.4.9.N and EN 170

EC Certificate Number 0726, issued by INSPEC Certification Limited



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK



UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 19/05/14, V3

EVO[®] GOGGLE INDIRECT VENTED - CLEAR LENS

PRODUCT CODE: AGM020-623-000 - ALSO KNOWN AS: G241

SLEEK, MODERN DESIGN, ENGINEERED TO OFFER OUTSTANDING PERFORMANCE, COMFORT AND LOOKS. OFFERING DUST, LIQUID SPLASH, MOLTEN METAL, EXTREME TEMPERATURE AND 99.9% UV PROTECTION

**TECHNICAL
SPECIFICATION**


EYE & FACE PROTECTION

DIMENSIONS OF OUTER PACKAGING

Quantity: 50

Weight: 6.6kg (Approx.)

HEIGHT:
315mm

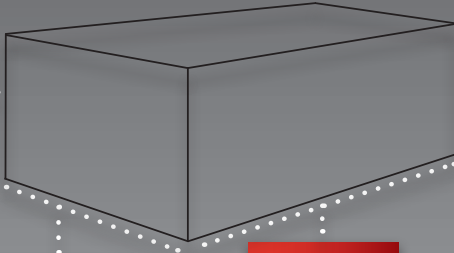

WIDTH:
404mm

LENGTH:
409mm



MATERIALS

Frame: Polyvinyl Chloride

Lens: Polycarbonate

Headband: Textile Elastic (Nylon Wooly)

Foam: NBR

Headband Fittings: Nylon

DIMENSIONS OF EVO[®] GOGGLE

Height: 71mm

Width: 210mm

Length: 100mm

Strap Length: Min: 275mm Max: 490mm (Approx.)

Weight: 108g (Approx.)

EVO[®] GOGGLE COLOURS

Body: Grey Tint

Lens: Clear

MARKINGS

Body: EN166:2001 349BT

Lens: 2-1.2  1.B.T.9.N

LIMITATIONS OF USE

Protection will only be offered if the goggles are fitted correctly

If the lens become scratched or damaged they should be replaced, likewise if the goggles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The goggle body, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer