


# Fall arrest lanyard SINGLE

## TECHNICAL SPECIFICATION

### HEIGHT SAFETY

These Fall arrest lanyards come with the energy absorption feature incorporated within their core, They do not require any extra energy absorption pack, hence are lighter in weight.

#### FAR0404

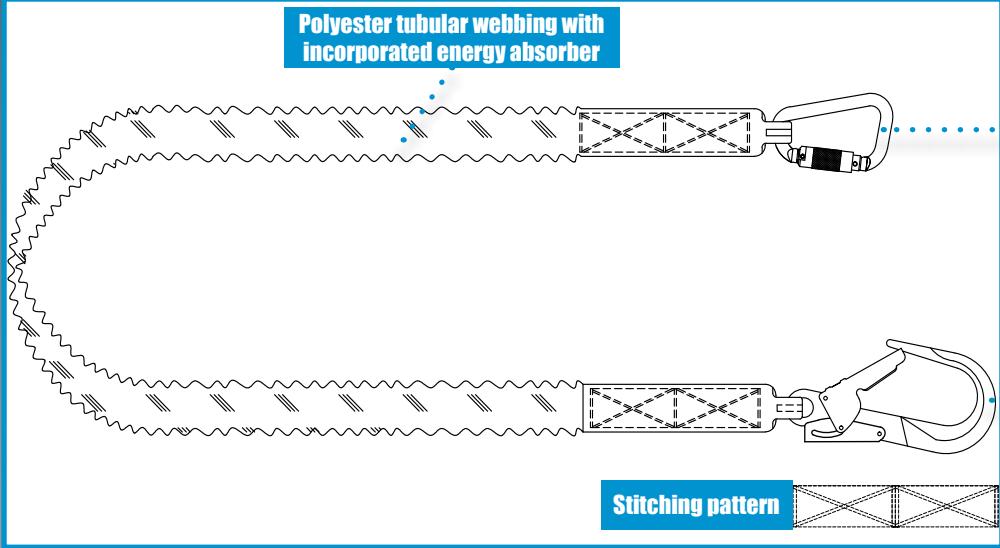

#### FAR0905

#### FAR0901

### METAL COMPONENTS

Material: Connectors in aluminium  
Finish: Black  
Breaking strength: 23 kN

### DIMENSIONS

Size: 2 meters  
Weight: 989 g (+- 10 g)

### CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

- Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.
- Ensure that NO alterations to the product are made.
- Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

### STITCHING THREAD

Material: High-tenacity polyester

### WEBBING

Material: polyester tubular webbing  
Width: 44+-1 mm  
Breaking strength: 25 kN

### CHARACTERISTICS

Elasticated lanyard with incorporated shock absorbing webbing.

- 1 quarter turn aluminium connector. Gate opening: 21 mm. Conforms to EN362:2004 Class B
- 1 aluminium scaffold hook. Gate opening 60 mm. Conforms to EN362:2004 Class T
- 40 mm wide tubular polyester webbing with textile loops.

### CONFORMITY

EN 355: 2002

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN for 3 Minutes.

Dynamic strength: Maximum breaking force does not exceed 6kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kgs.

