

Self Retractable Lifeline


MICRO BLOCK 2 METERS

One of the lightest in its class.

TECHNICAL
SPECIFICATION

HEIGHT SAFETY

FAR0701

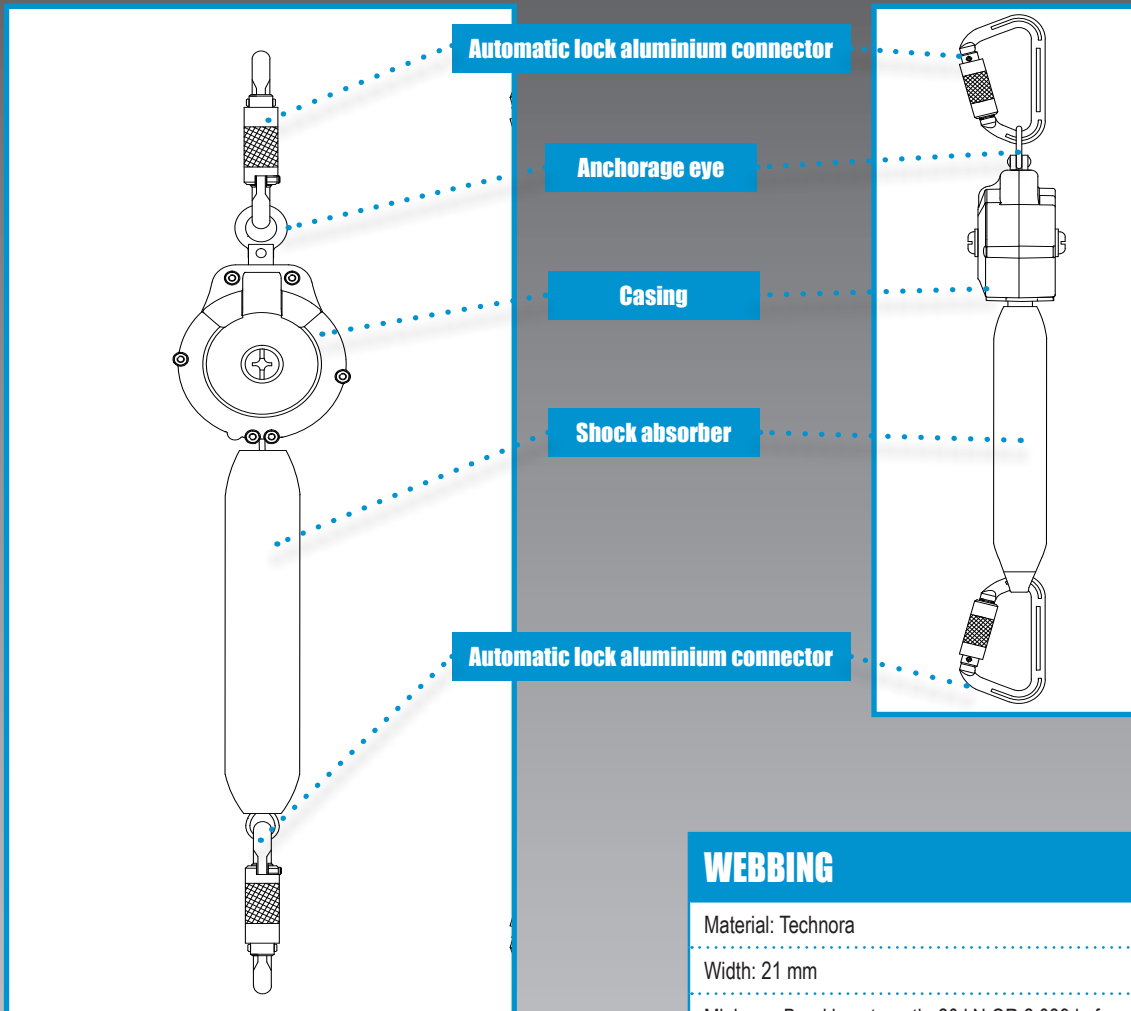

DIMENSIONS

Length: 2 meters

Weight: 848.5 g (+/- 20 g)

CLEANING & MAINTENANCE

In case of minor soiling, wipe the equipment with a cotton cloth or soft brush. Do not use any abrasive material. For intensive cleaning wash in water at a temperature between 250C to 500C using a neutral detergent. It should be allowed to dry by itself and be kept away from open fires/ flames or any other source of heat. Avoid direct sunlight.

The user should carry out a pre-use check of the Self Retractable Lifeline, to ensure that it is in a serviceable condition and operates correctly before it is used.

The pre-use check shall involve checking of any wear or abrasion on wire ropes/webbing and sign of corrosion if any on metal parts or any breakage of the casing.

WEBBING

Material: Technora

Width: 21 mm

Minimum Breaking strength: 20 kN OR 2,039 kgf

CHARACTERISTICS

Robust and durable plastic casing.

Webbing width 21 mm with shock absorber.

2 quarter turn gate aluminium connector on both ends. Gate opening: 21 mm. Conforms to EN362:2004 Class B.

CONFORMITY

EN 360: 2002 Rated to 140 kg

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Horizontal use (Sharp Edge VG11 RFU 11.060:2014), fall factor 2 use

Static strength: 15 kN for 3 min

Dynamic strength: 100 kg mass free fall with the breaking force of less than 6 kN & arrest distance less than 2 meters.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 08/10/2018. V1