EN14052 HIGH IMPACT HELMET - WHEEL RATCHET - NON-VENTILATED

TECHNICAL SPECIFICATION

HEAD PROTECTION

PRODUCT CODE: AHS150-00 - 00

THE WORLDS STRONGEST INDUSTRIAL SAFETY HELMET

INSTRUCTIONS FOR USE

Fit helmet on head and fasten strap to ensure fit

For adequate protection this helmet must be worn with peak facing forward

Ensure the helmet is adjusted to the size of the user's head


COMFORT:

Extremely comfortable terylene webbing moulds to the individual wearer's head. Lightweight EPS liner reduces weight while still offering maximum protection



WEBBING HARNESS:

LDPE Strap & Webbing Clips with Nylon Webbing Straps Microfibre comfort padding

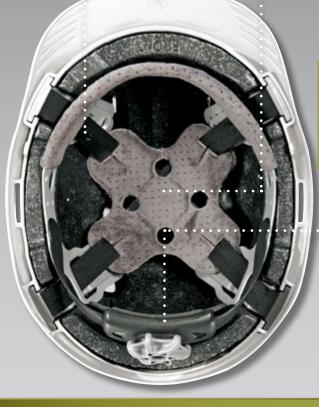

WHEEL RATCHET:

Intuitive thumb and fore finger press points for easy adjustment of the wheel ratchet, offers diverse size ranges for true 'One Size Fits All'



CONFORMITY

Conforms to EN 14052, Higher Performance Industrial Safety Helmet

EN 50365, Electrically insulating helmets for use on low voltage insulations

ANSI Z89.1-2009, American National Standard for Industrial Head Protection, as a Type II, Class E Helmet

Also conforms to FOCT P 50460-92

High comfort fit

Wide size range (adjustment 53-64cm)

Available in a choice of colours

Company personalisation available by printing

Accessories available

Electrical Insulation

CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried with a soft cloth

The helmet should not be cleaned with chemical or abrasive

The helmet should be stored out of direct sunlight

The helmet should be stored away from chemicals and extremes of temperature



















EN14052 HIGH IMPACT HELMET - WHEEL RATCHET - NON-VENTILATED

TECHNICAL **SPECIFICATION**

HEAD PROTECTION

PRODUCT CODE: AHS150-00 - 00

THE WORLDS STRONGEST INDUSTRIAL SAFETY HELMET

DIMENSIONS OF OUTER PACKAGING

Quantity: 8

Weight: 4.85kg (Approx.)



DIMENSIONS OF HELMET

Size: 530mm x 640mm

Weight: 550g (Approx.)



HELMET COLOURS

Insert the following two digit number in place of the dashes in the product code of your desired helmet







HELMET FEATURES

EN STANDARD	EN14052 EN397 EN50365	Yes Yes Yes
PERFORMANCE	Impact Resistance Side Impact Electrical Insulation	100 Joules 50 Joules Yes: EN397 440V EN50365 1000V
TEMPERATURE RESISTANCE	Molten Metal (MM) +50°C Low Temperature	Yes Yes: EN14052 -40°C FOCT P 50460-92 -40°C
SHELL MATERIAL	HDPE Recyclable UV Stabilised	Yes Yes Yes
HARNESS MATERIAL	LDPE Textile	Yes Yes
OPTIONS	Universal Accessories 4pts Chin strap	Yes Yes
HARNESS SYSTEM OPTIONS	JSP 3D Wheel Ratchet 6 pts	Yes Yes Yes
LOGO OPTIONS	Front Side MOQ Logo	Yes Yes 40

LIMITATIONS OF USE

Protection will only be offered if the helmet is fitted correctly

Any helmet subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer

The harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

















