


Harness SPARTAN® 3 POINTS

TECHNICAL
SPECIFICATION

HEIGHT SAFETY

A Harness that has value in mind yet is still compliant, designed for those that may need height safety but only on certain occasions, a stylish product that does not falter when safety is paramount.

FAR0303

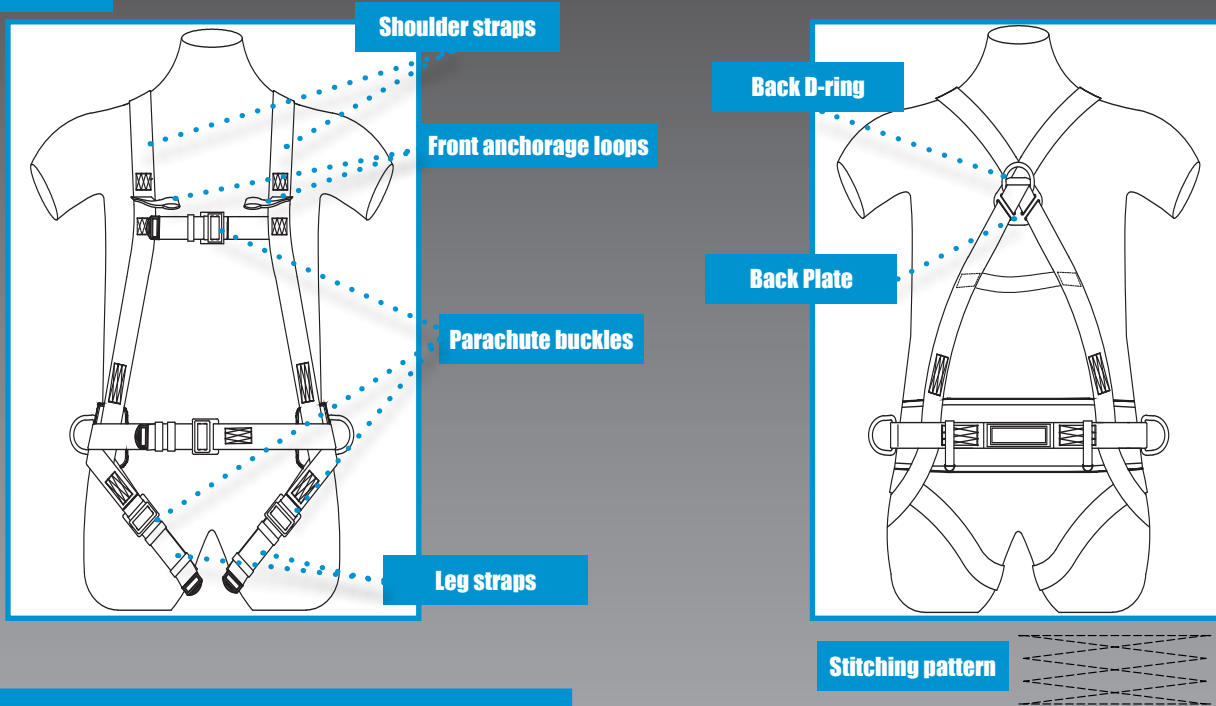

METAL COMPONENTS

Material: Alloy steel

Finish: Golden yellow galvanized

Breaking strength: 23 kN (buckle and frame 15 kN)

DIMENSIONS

Size: Universal

Weight: 1430 g (+/- 10 g)

STITCHING THREAD

Material: High-tenacity polyester

CLEANING & MAINTENANCE

Maintenance of this Safety Harness must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the Safety Harness, drip dry the equipment allowing the Safety Harness to thoroughly dry out before next use.

Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the lanyard is made after cleaning, before the item is allowed to be re-used.

WEBBING

Material: Polyester

Width: 44+/-1 mm

Breaking strength: 23 kN

CHARACTERISTICS

One dorsal attachment D-ring for fall arrest

Sternal textile loops as anchor point for fall arrest

Adjustable chest and leg straps

Sit straps

Plastic retainers to keep straps tidy

Fall indicator for easy inspection

Work positioning padded belt with tool keepers

Lateral D-rings for work positioning

Labels of inspection and instructions protected in a black PVC pouch

CONFORMITY

EN 361: 2002 & EN 358: 1999 Rated to 136 kg

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN of 1530 kgf for 3 min at each attachment element

Dynamic strength: Free fall from 4 m height donned to a test dummy weighing 100 kg at each attachment element



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 07/08/2018. V1