

Harness PIONEER


1 POINT

TECHNICAL SPECIFICATION

HEIGHT SAFETY

The Pioneer range has a two tone colour scheme to help the user in donning and inspection. Along with light alloy steel hardware makes this a comfortable day to day product.


FAR0201

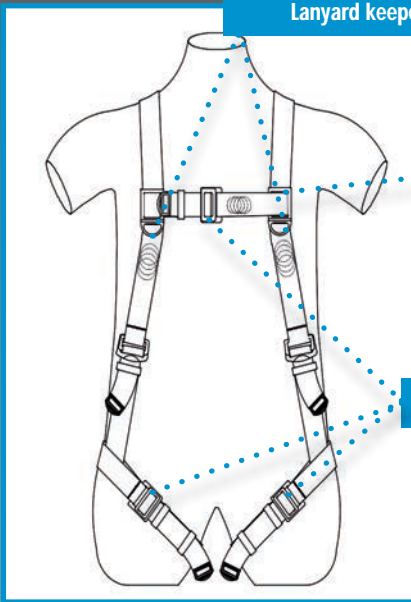

Lanyard keepers

Adjustment buckle

Parachute buckles

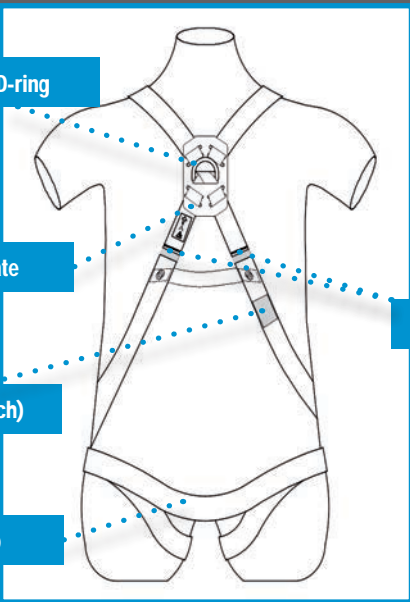

Back D-ring

Back Plate

Labels (pouch)

Sit Strap

Fall indicators

Stitching pattern



METAL COMPONENTS

Material: Alloy steel.

Finish: Black powder coated.

Breaking strength: 23 kN (buckle and frame 15 kN).

DIMENSIONS

Size: Universal.

Weight: 1100 g (+- 10 g).

STITCHING THREAD

Material: High-tenacity polyester.

CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that the following cleaning methods are NOT used: water over 40°C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

WEBBING

Material: Polyester.

Width: 44+-1 mm.

Breaking strength: 25 kN.

CHARACTERISTICS

One dorsal attachment D-ring for fall arrest.

Lanyard keepers on the shoulders.

Adjustable shoulders, chest and leg straps.

Sub-pelvic strap.

Plastic retainers to keep straps tidy.

Fall indicator for easy inspection.

Labels of inspection and instructions protected in clear plastic.

Labels of inspection and instructions protected in clear plastic.

CONFORMITY

EN 361: 2002 Rated to 140 kg.

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN for 3 min at each attachment element.

Dynamic strength: Free fall from 4 m height donned and weighed 100 kg at each attachment element.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 13/01/2020-1


Work positioning Lanyard

TECHNICAL SPECIFICATION

HEIGHT SAFETY

Lanyard equipped with 2 captive eye automatic connectors on both ends.

FAR0208

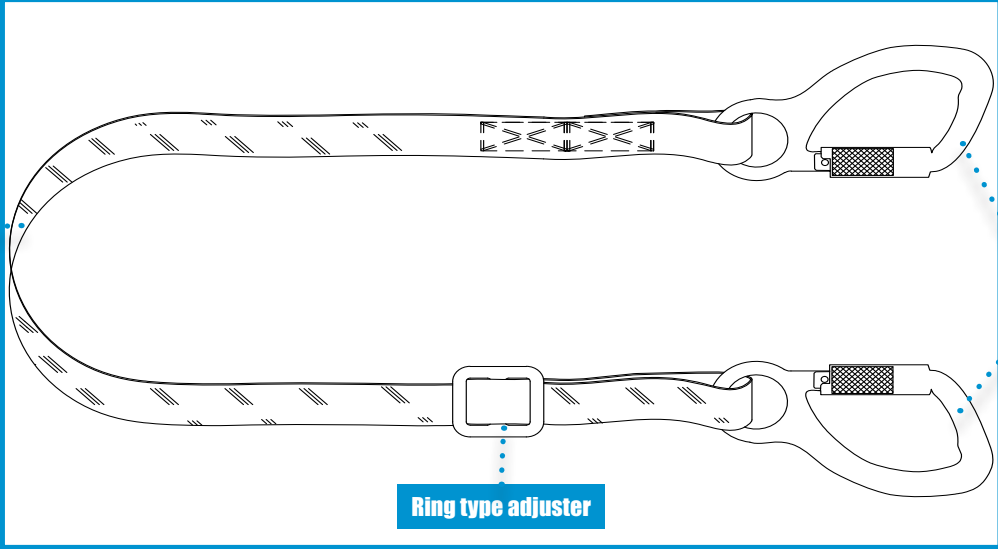

Polyester Webbing

Connector captive eye

Ring type adjuster

Stitching pattern



METAL COMPONENTS

Material: Forged alloy steel rope adjuster ring

Finish: deburred and polished

DIMENSIONS

Size: 2 meters

Weight: 587 g (+- 10 g)

CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that NO alterations to the product are made.

Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

WEBBING

Material: polyester

Width: 33 mm

Breaking strength: > 30 kN

CHARACTERISTICS

2 captive eye quarter turn aluminium connectors. Gate opening: 22 mm. Conforms to EN362:2004 Class T

Adjustable length up to 2 meters.

Adjustment by use of ring type adjuster.

Connectors provided at both ends for attachment.

CONFORMITY

EN 358: 1999

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN for 3 Minutes.

Dynamic strength: Free fall from 1 m height with a test mass of 100 kgs.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 15/03/2019, V2